

MOLEX KK® Series Headers (.156")

.156" PCB HEADERS

• Current: 7.0A • Voltage: 250V

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Dimensions (mm)		Price Each				
				A	B	1	10	100	500	
Vertical Friction Lock, Tin Plating UL94V-0, Polyester										
538-26-60-4020	26-60-4020	A	2	7.77	3.96	.25	.20	.14	.10	
538-26-60-4030	26-60-4030	A	3	11.73	7.92	.35	.30	.20	.16	
538-26-60-4040	26-60-4040	A	4	15.70	11.89	.44	.38	.25	.20	
538-26-60-4050	26-60-4050	A	5	19.66	15.85	.52	.45	.30	.24	
538-26-60-4060	26-60-4060	A	6	23.62	19.81	.61	.53	.35	.28	
538-26-60-4070	26-60-4070	A	7	27.58	23.77	.69	.60	.40	.32	
538-26-60-4080	26-60-4080	A	8	31.55	27.74	.78	.68	.45	.36	
538-26-60-4090	26-60-4090	A	9	35.51	31.70	.86	.76	.50	.40	
538-26-60-4100	26-60-4100	A	10	39.47	35.66	.95	.83	.55	.44	
538-26-60-4110	26-60-4110	A	11	43.43	39.62	1.03	.91	.60	.48	
538-26-60-4120	26-60-4120	A	12	47.40	43.59	1.12	.98	.65	.52	
Vertical Friction Lock, Gold Plating UL94V-0, Polyester										
538-26-61-4020	26-61-4020	A	2	7.77	3.96	.89	.78	.52	.41	
538-26-61-4030	26-61-4030	A	3	11.73	7.92	1.27	1.12	.74	.59	
538-26-61-4040	26-61-4040	A	4	15.70	11.89	1.50	1.41	.95	.76	
538-26-61-4050	26-61-4050	A	5	19.66	15.85	1.28	.96	.81	.65	
538-26-61-4060	26-61-4060	A	6	23.62	19.81	1.54	1.15	.96	.77	
538-26-61-4070	26-61-4070	A	7	27.58	23.77	1.86	1.39	1.16	.93	
538-26-61-4080	26-61-4080	A	8	31.55	27.74	3.12	2.75	1.83	1.47	
538-26-61-4090	26-61-4090	A	9	35.51	31.70	3.50	3.09	2.06	1.64	
538-26-61-4100	26-61-4100	A	10	39.47	35.66	3.89	3.42	2.28	1.82	
538-26-61-4110	26-61-4110	A	11	43.43	39.62	4.26	3.76	2.50	2.00	
538-26-61-4120	26-61-4120	A	12	47.40	43.59	4.66	4.10	2.73	2.19	
Right Angle Friction Lock, Tin Plating										
538-26-60-5020	26-60-5020	B	2	7.77	3.96	.28	.24	.16	.13	
538-26-60-5030	26-60-5030	B	3	11.73	7.92	.37	.32	.21	.17	
538-26-60-5040	26-60-5040	B	4	15.70	11.89	.46	.40	.27	.21	
538-26-60-5050	26-60-5050	B	5	19.66	15.85	.55	.48	.32	.25	
538-26-60-5060	26-60-5060	B	6	23.62	19.81	.71	.62	.41	.33	
538-26-60-5070	26-60-5070	B	7	27.58	23.77	.73	.64	.43	.34	
538-26-60-5080	26-60-5080	B	8	31.55	27.74	.82	.72	.62	.52	
538-26-60-5090	26-60-5090	B	9	35.51	31.70	.92	.80	.65	.62	
538-26-60-5100	26-60-5100	B	10	39.47	35.66	1.01	.88	.59	.47	
538-26-60-5110	26-60-5110	B	11	43.43	39.62	1.10	.96	.64	.51	
538-26-60-5120	26-60-5120	B	12	47.40	43.59	1.19	1.05	.69	.55	
Vertical, Without Pegs, Tin Plating										
538-26-60-2020	26-60-2020	C	2	7.77	3.96	.19	.15	.11	.10	
538-26-60-2030	26-60-2030	C	3	11.73	7.92	.31	.23	.13	.12	
538-26-60-2040	26-60-2040	C	4	15.70	11.89	.37	.28	.16	.14	
538-26-60-2050	26-60-2050	C	5	19.66	15.85	.34	.31	.28	.25	
538-26-60-2100	26-60-2100	C	10	39.47	35.66	.60	.57	.54	.51	
538-26-60-2120	26-60-2120	C	12	47.40	43.59	.70	.63	.60	.56	

.156" BREAKAWAY HEADERS - PCB

• Contact: Brass • Square pins • Voltage: 250VAC • RoHS compliant per Molex documentation


RoHS Compliant

• Current: 7.0A max. (dependent on connection and PC Board)

For quantities of 1000 and up, call for quote.

MOUSER STOCK NO.	Molex Part No.	Fig.	No. of Circuits	Dimensions (mm)		Price Each				
				A	B	1	10	100	500	
Vertical, Tin Plating UL94V-0, Polyester										
538-26-48-1021	26-48-1021	D	2	6.78	3.96	.25	.12	.09	.08	
538-26-48-1031	26-48-1031	D	3	10.74	7.92	.26	.19	.11	.10	
538-26-48-1041	26-48-1041	D	4	14.71	11.89	.29	.25	.15	.12	
538-26-48-1051	26-48-1051	D	5	18.67	15.85	.36	.32	.19	.15	
538-26-48-1061	26-48-1061	D	6	22.63	19.81	.44	.38	.23	.18	
538-26-48-1071	26-48-1071	D	7	26.59	23.77	.51	.45	.27	.21	
538-26-48-1081	26-48-1081	D	8	30.56	27.74	.35	.31	.28	.24	
538-26-48-1091	26-48-1091	D	9	24.52	31.70	.66	.58	.35	.28	
538-26-48-1101	26-48-1101	D	10	38.48	35.66	.89	.81	.73	.65	
538-26-48-1111	26-48-1111	D	11	42.44	39.62	.81	.71	.42	.36	
538-26-48-1121	26-48-1121	D	12	46.41	43.59	.88	.77	.46	.37	
538-26-48-1241	26-48-1241	D	24	93.85	91.14	1.47	1.29	.86	.69	
Right Angle, Tin Plating										
538-26-48-1022	26-48-1022	E	2	6.78	3.96	.24	.22	.20	.18	
538-26-48-1032	26-48-1032	E	3	10.74	7.92	.25	.21	.13	.11	
538-26-48-1042	26-48-1042	E	4	14.71	11.89	.33	.29	.17	.14	
538-26-48-1052	26-48-1052	E	5	18.67	15.85	.41	.36	.21	.17	
538-26-48-1062	26-48-1062	E	6	22.63	19.81	.50	.43	.26	.21	
538-26-48-1082	26-48-1082	E	8	30.56	27.74	.66	.58	.35	.28	
538-26-48-1102	26-48-1102	E	10	38.48	35.66	.83	.73	.43	.35	
538-26-48-1122	26-48-1122	E	12	46.41	43.59	1.00	.87	.52	.42	
538-26-48-1242	26-48-1242	E	24	93.85	91.14	1.52	1.34	.89	.71	
Vertical Friction Lock, Tin Plating										
538-26-48-1025	26-48-1025	F	2	6.78	3.96	.25	.16	.09	.07	
538-26-48-1035	26-48-1035	F	3	10.74	7.92	.28	.24	.14	.11	
538-26-48-1045	26-48-1045	F	4	14.71	11.89	.37	.32	.19	.15	
538-26-48-1055	26-48-1055	F	5	18.67	15.85	.47	.41	.24	.19	
538-26-48-1065	26-48-1065	F	6	22.63	19.81	.56	.49	.29	.23	
538-26-48-1075	26-48-1075	F	7	26.59	23.77	.65	.57	.34	.24	
538-26-48-1085	26-48-1085	F	8	30.56	27.74	.75	.66	.39	.31	
538-26-48-1095	26-48-1095	F	9	24.52	31.70	.84	.74	.44	.35	
538-26-48-1105	26-48-1105	F	10	38.48	35.66	.94	.82	.49	.39	
538-26-48-1115	26-48-1115	F	11	42.44	39.62	.65	.48	.40	.32	
538-26-48-1125	26-48-1125	F	12	46.41	43.59	.70	.58	.53	.49	
538-26-48-1245	26-48-1245	F	24	93.85	91.14	1.12	1.00	.71	.57	
Right Angle Friction Lock, Tin Plating										
538-26-48-1026	26-48-1026	G	2	6.78	3.96	.28	.14	.12	.10	
538-26-48-1036	26-48-1036	G	3	10.74	7.92	.32	.27	.16	.13	
538-26-48-1046	26-48-1046	G	4	14.71	11.89	.43	.37	.22	.18	
538-26-48-1066	26-48-1066	G	6	22.63	19.81	.63	.55	.33	.26	
538-26-48-1076	26-48-1076	G	7	26.59	23.77	.75	.66	.39	.31	
538-26-48-1086	26-48-1086	G	8	30.56	27.74	.85	.75	.45	.36	
538-26-48-1096	26-48-1096	G	9	24.52	31.70	.96	.84	.50	.41	
538-26-48-1106	26-48-1106	G	10	38.48	35.66	.71	.53	.44	.35	
538-26-48-1126	26-48-1126	G	12	46.41	43.59	1.12	.94	.75	.67	
538-26-48-1246	26-48-1246	G	24	93.85	91.14	1.00	.83	.66	.60	

DIMENSIONS mm (IN.)

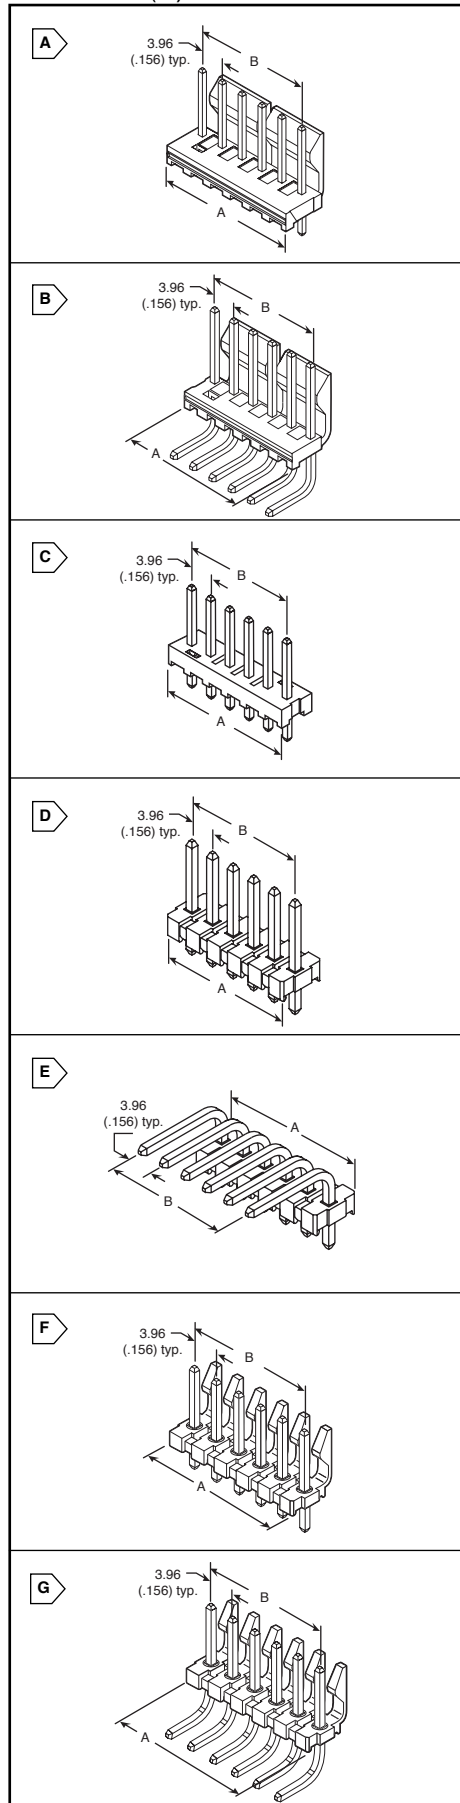

Rectangular Connectors
Molex