


# ELECTROSWITCH Rotary Switches

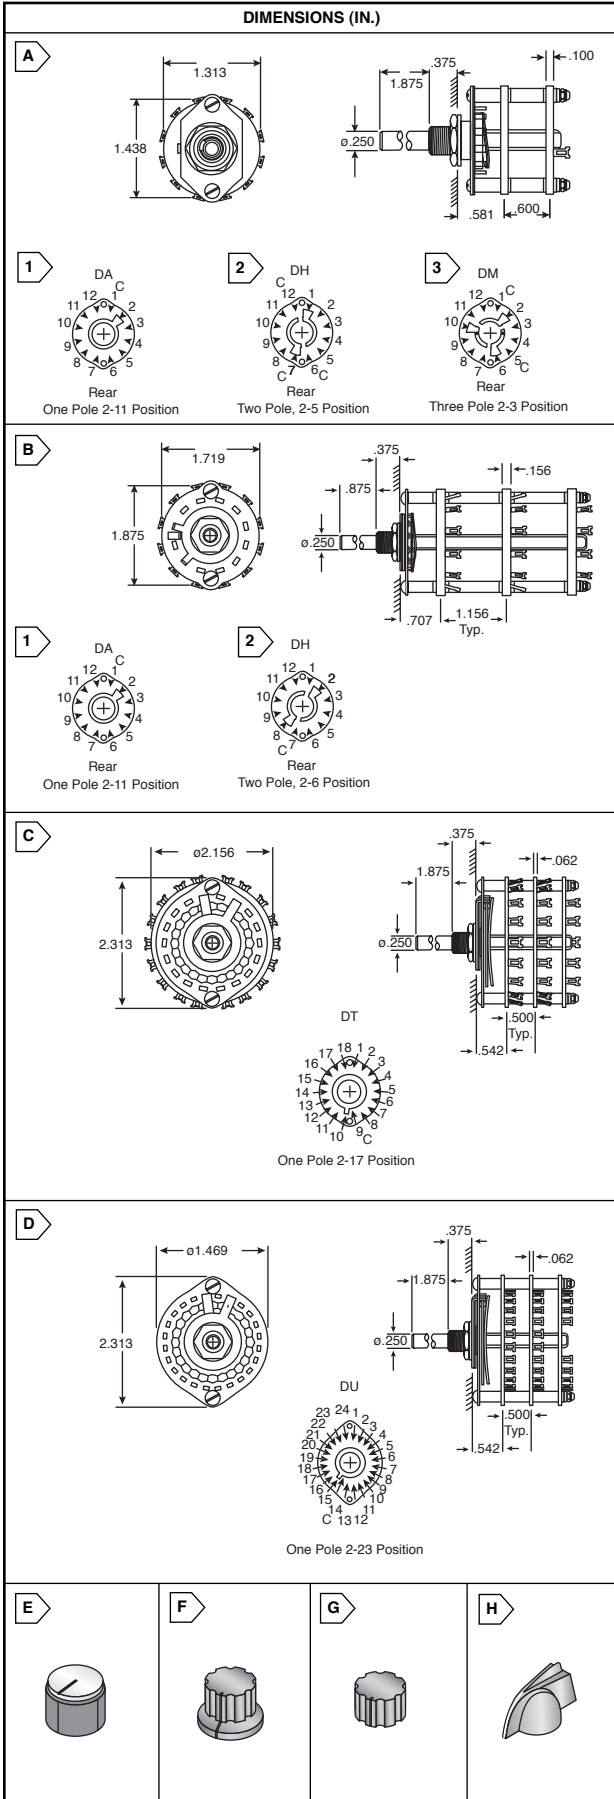

© Copyright 2007 Mouser Electronics

[www.mouser.com/electroswitch](http://www.mouser.com/electroswitch)

## ELECTROSWITCH D4 SERIES: 1.437" DIAMETER GLASS EPOXY OPEN FRAME ROTARY SWITCHES

### Specifications:

- Make I Break Current/Voltage Rating 1.5@28VDC; 0.5A@115VAC
- Current carrying capacity: 9A
- Dielectric Strength: 1000VAC
- Insulation Material: Glass epoxy

- Clips and rotors: Silver alloy
- Termination: Solder lug
- Index: Single-ball, hill and valley
- Non-shorting

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Fig.	Poles	Active Positions	Poles/ Deck	No. of Decks	Index Angle	Price Each			
								1	10	25	50
<a href="#">690-D4G0111N</a>	D4G0111N	A1	01	02-11	1	1	30°	22.82	22.40	21.00	19.60
<a href="#">690-D4G0205N</a>	D4G0205N	A2	02	02-05	2	1	30°	22.82	22.40	21.00	19.60
<a href="#">690-D4G0303N</a>	D4G0303N	A3	03	02-03	3	1	30°	22.82	22.40	21.00	19.60
<a href="#">690-D4G0211N</a>	D4G0211N	A1	02	02-11	1	2	30°	30.64	30.08	28.20	26.32
<a href="#">690-D4G0405N</a>	D4G0405N	A2	04	02-05	2	2	30°	30.64	30.08	28.20	26.32
<a href="#">690-D4G0603N</a>	D4G0603N	A3	06	02-03	3	2	30°	30.64	30.08	28.20	26.32
<a href="#">690-D4G0311N</a>	D4G0311N	A1	03	02-11	1	3	30°	38.47	37.76	35.40	33.04
<a href="#">690-D4G0605N</a>	D4G0605N	A2	06	02-05	2	3	30°	38.47	37.76	35.40	33.04
<a href="#">690-D4G0411N</a>	D4G0411N	A1	04	02-11	1	4	30°	46.46	45.60	42.75	39.90
<a href="#">690-D4G0511N</a>	D4G0511N	A1	05	02-11	1	5	30°	54.44	53.44	50.10	46.76

## ELECTROSWITCH SECTION ASSEMBLIES FOR D4 SERIES

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Poles	No. of Positions	Poles/ Sections	Index Angle	Price Each			
						1	10	25	50
<a href="#">690-D4C-1</a>	D4C-1	01	02-12	1	30°	26.73	26.24	24.60	22.96
<a href="#">690-D4C-3</a>	D4C-3	02	02-06	2	30°	28.53	28.00	26.25	24.50
<a href="#">690-D4C-5</a>	D4C-5	03	02-05	3	30°	30.64	30.08	28.20	26.32
<a href="#">690-D4G-31</a>	D4G-31	01	02-11	1	30°	10.76	10.56	9.90	9.24
<a href="#">690-D4G-33</a>	D4G-33	02	02-05	2	30°	11.90	11.68	10.95	10.22
<a href="#">690-D4G-35</a>	D4G-35	03	02-03	3	30°	13.04	12.80	12.00	11.20

## ELECTROSWITCH D7 SERIES: 1 7/8" DIAMETER OPEN FRAME ROTARY SWITCHES

### Specifications:

- Shaft diameter: .250"
- Current and Voltage Rating: 2.25A @28VDC; 1A @115VAC
- Current carrying capacity: 9A
- Dielectric Strength: 1500VAC
- Insulation material: D7C - Ceramic; D7G - Glass epoxy

- Clips and rotors: Brass with silver plate
- Termination: Solder lug
- Index: Dual-ball, hill and valley
- Non-shorting

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Fig.	Poles	Active Positions	Poles/ Deck	No. of Decks	Index Angle	Price Each			
								1	10	25	50
<a href="#">690-D7C0111N</a>	D7C0111N	B1	01	02-11	1	1	30°	35.86	35.20	33.00	30.80
<a href="#">690-D7C0211N</a>	D7C0211N	B1	02	02-11	1	2	30°	57.05	56.00	52.50	49.00
<a href="#">690-D7C0405N</a>	D7C0405N	B2	04	02-05	2	2	30°	57.05	56.00	52.50	49.00
<a href="#">690-D7C0605N</a>	D7C0605N	B2	06	02-05	2	3	30°	78.57	77.12	72.30	67.48
<a href="#">690-D7G0111N</a>	D7G0111N	B1	01	02-11	1	1	30°	26.73	26.24	24.60	22.96

## ELECTROSWITCH D8 SERIES: 2 5/16" DIAMETER OPEN FRAME ROTARY SWITCHES

### Specifications:

- Shaft diameter: .250"
- Current and Voltage Rating: 2.25A @28VDC; 1A @115VAC
- Current carrying capacity: 9A
- Dielectric Strength: 1000VAC
- Insulation Material: Glass epoxy

- Clips and rotors: Brass with silver plate
- Termination: Solder lug
- Index: Dual-ball, hill and valley
- Non-shorting

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Fig.	Poles	Active Positions	Poles/ Deck	No. of Decks	Index Angle	Price Each			
								1	10	25	50
<a href="#">690-D8G0117N</a>	D8G0117N	C	01	02-17	1	1	20°	36.35	35.68	33.45	31.22
<a href="#">690-D8G0217N</a>	D8G0217N	C	02	02-17	1	2	20°	54.28	53.28	49.95	46.62
<a href="#">690-D8G0417N</a>	D8G0417N	C	04	02-17	1	4	20°	90.47	88.80	83.25	77.70

## ELECTROSWITCH D9 SERIES: 2 5/16" DIAMETER OPEN FRAME ROTARY SWITCHES

### Specifications:

- Shaft diameter: .250"
- Current and Voltage Rating: 1.5A @ 28VDC; 25A @ 115VAC
- Current carrying capacity: 9A
- Dielectric Strength: 1000VAC
- Insulation Material: Glass epoxy

- Clips and rotors: Brass with silver plate
- Termination: Solder lug
- Index: Dual-ball, hill and valley
- Non-shorting

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Fig.	Poles	Active Positions	Poles/ Deck	No. of Decks	Index Angle	Price Each			
								1	10	25	50
<a href="#">690-D9G0123N</a>	D9G0123N	D	01	02-23	1	1	15°	36.02	35.36	33.15	30.94
<a href="#">690-D9G0223N</a>	D9G0223N	D	02	02-23	1	2	15°	53.79	52.80	49.50	46.20
<a href="#">690-D9G0423N</a>	D9G0423N	D	04	02-23	1	4	15°	89.49	87.84	82.35	76.86

## KNOBS

For quantities of 100 and up, call for quote.

MOUSER STOCK NO.	Electroswitch Part No.	Fig.	Description	Price Each			
				1	10	25	50
<a href="#">690-1202BJ</a>	1202BJ	E	Round knob w/ spun silver cap, set screw	5.05	4.96	4.65	4.34
<a href="#">690-1930BP</a>	1930BP	F	Large round knob w/ skirt, set screw	4.08	4.00	3.75	3.50
<a href="#">690-1914N</a>	1914N	G	Round knob w/ brass insert, set screw	6.03	5.92	5.55	5.18
<a href="#">690-2300</a>	2300	H	Pointer knob w/ set screw	1.79	1.76	1.65	1.54



a ti company

© Copyright 2007 Mouser Electronics

(800) 346-6873

1379