


Pure Lead and Sealed Lead Acid Batteries

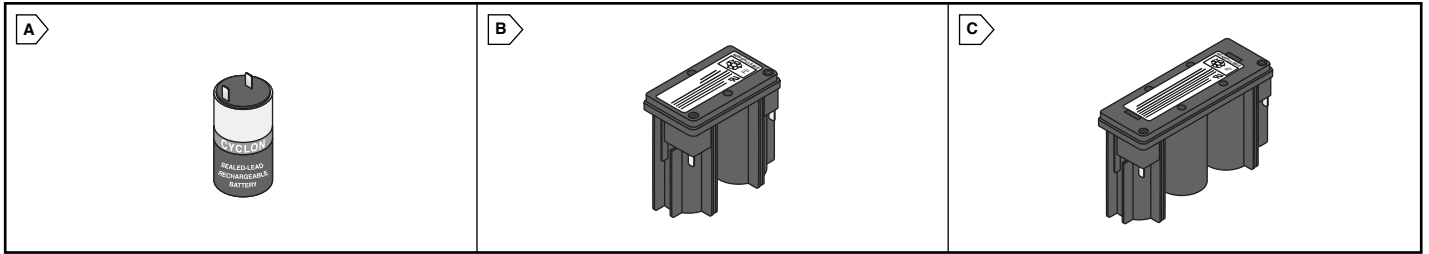

EnerSys PURE LEAD RECHARGEABLE BATTERIES

- High-rate power density
- Capable of more than 300 cycles
- High stable voltage delivery
- Wide temperature range: Cyclon Single Cells: -65°C to +80°C Monobloc: -40°C to +40°C
- Fast Recharge- up to 95% recharge in less than one hour
- Maintains performance and physical parameters in extreme conditions
- Can be mounted and operated in any position
- Provides the longest service life possible
- Low self-discharge rate
- Rugged construction

Cyclon 2 Volt Single Cells

* With 6mm negative / 8mm positive post terminals.

For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Energys Part No.	Fig.	Size	Capacity (Ah)	Dimensions (In.)					Price Each			
					Diameter	Height	Height Over Term.	Weight (lbs.)	Tabs	1	5	10	25
846-0810-0004	0810-0004	A	D	2.5	1.35	2.41	2.68	0.39	.187x0.25	7.12	6.55	6.16	5.78
846-0800-0004	0800-0004	A	X	5.0	1.75	2.87	3.21	0.80	.250 x .025	10.77	9.90	9.32	8.74
846-0840-0004	0840-0004	A	J	12.0	2.04	4.85	5.34	1.85	0.312 x 0.032	48.43	46.21	43.67	41.32
* 846-0820-0004	0820-0004	A	BC	25.0	2.57	6.25	6.82	3.68	M6 (-) and M8 (+)	46.47	42.71	40.20	37.69


Cyclon 4 and 6 Volt Monoblocks

For quantities of 50 and up, call for quote.

MOUSER STOCK NO.	Energys Part No.	Fig.	Size	Capacity (Ah)	Dimensions (In.)					Price Each			
					Diameter	Height	Height Over Term.	Weight (lbs.)	Tabs	1	5	10	25
4 Volt													
846-0819-0010	0819-0010	B	D	2.5	3.13	1.81	2.75	0.8	0.187 x .025	14.69	13.50	12.70	11.91
846-0809-0010	0809-0010	B	X	5.0	3.80	2.12	3.02	1.62	0.250 x .025	20.28	18.64	17.54	16.44
846-0859-0010	0859-0010	B	E	8.0	3.81	2.13	4.00	2.11	0.250 x .025	22.40	20.59	19.38	18.49
6 Volts													
846-0819-0012	0819-0012	C	D	2.5	4.48	1.81	2.75	1.15	0.187 x .025	17.48	16.07	15.12	14.18
846-0809-0012	0809-0012	C	X	5.0	5.48	2.12	3.02	2.16	0.250 x .025	24.25	22.28	20.97	19.66
846-0859-0012	0859-0012	C	E	8.0	5.48	2.13	4.00	3.15	0.250 x .025	29.62	27.22	25.63	24.02

Panasonic SEALED LEAD-ACID BATTERIES

- High quality and reliability
- Exceptional deep discharge recover
- No corrosive gas generation
- Long service life
- Quick chargeability
- High power density
- Maintenance-free operation



For quantities of 10 and up, call for quote.

MOUSER STOCK NO.	Panasonic Part No.	Nominal Voltage	Capacity 20 Hr. Rate (Ah)	Terminal Type	Dimensions (In.)			Weight (lbs.)	Cycle Use		Trickle Use		Price Each
					L	W	H		Initial Current	Control Volt.	Initial Current	Control Volt.	
658-LCR061R3P	LC-R061R3P	6	1.3	.187" Faston	3.82	0.95	1.97	0.66	0.52A	7.25-7.45V	0.195A	6.8-6.9V	10.15
658-LCR063R4PU	LC-R063R4PU	6	3.4	.187" Faston	5.28	1.34	2.36	1.37	1.36A	14.5-14.9V	0.51A	13.6-13.8V	16.75
658-LCR064R5P	LC-R064R5P	6	4.5	.187" Faston	2.76	1.89	4.02	1.59	1.80A	7.25-7.45V	.675A	6.8-6.9V	12.76
658-LCR067R2P	LC-R067R2P	6	7.2	.187" Faston	5.95	1.34	3.70	2.78	2.88A	7.25-7.45V	1.08A	6.8-6.9V	15.70
658-LCR067R2P1	LC-R067R2P1	6	7.2	.250" Faston	5.95	1.34	3.70	2.78	2.88A	7.25-7.45V	1.08A	6.8-6.9V	15.70
658-LCR0612P	LC-R0612P	6	12.0	.187" Faston	5.95	1.97	3.70	4.30	4.8A	7.25-7.45V	1.8A	6.8-6.9V	17.13
658-LCR0612P1	LC-R0612P1	6	12.0	.250" Faston	5.95	1.97	3.70	4.30	4.8A	7.25-7.45V	1.8A	6.8-6.9V	17.13
658-LCR121R3PU	LC-R121R3PU	12	1.3	.187" Faston	3.82	1.87	1.97	1.30	4.8A	7.25-7.45V	1.8A	6.8-6.9V	19.60
658-LCR122R2PU	LC-R122R2PU	12	2.2	.187" Faston	6.97	1.34	2.36	1.76	0.88A	14.5-14.9V	0.33A	13.6-13.8V	22.70
658-LCR123R4PU	LC-R123R4PU	12	3.4	.187" Faston	5.28	2.64	2.36	2.65	1.36A	14.5-14.9V	0.51A	13.6-13.8V	28.45
658-LCR127R2P	LC-R127R2P	12	7.2	.187" Faston	5.95	2.54	3.70	5.45	2.88A	14.5-14.9V	1.08A	13.6-13.8V	23.35
658-LCR127R2P1	LC-R127R2P1	12	7.2	.250" Faston	5.95	2.54	3.70	5.45	2.88A	14.5-14.9V	1.08A	13.6-13.8V	23.35
658-LCRD1217P	LC-RD1217P	12	17.0	Nut and Bolt	7.13	2.99	6.57	14.34	6.8A	14.5-14.9V	2.55A	13.6-13.8V	43.55
658-LCX1228P	LC-X1228P	12	28.0	Nut and Bolt	6.50	4.92	6.89	24.30	11.2A	14.5-14.9V	----	----	76.25
658-LCLA1233P	LC-LA1233P	12	33.0	Nut and Bolt	7.70	5.12	6.10	26.50	13.2A	14.5-14.9V	4.95A	13.6-13.8V	84.40

BK PRECISION BATTERY CAPACITY ANALYZER

Applications:

The need for battery maintenance tools is growing for use in Automotive, Field Service and Maintenance, Telecommunications, and UPS Manufacturing/Maintenance applications. Perfect instrument for anyone working with UPS systems, Emergency back-up Flood Lights, Home and Business Security Alarm Systems, or for any applications using a 12 volt lead acid battery.

Specifications:

- Measures both No Load Voltage and Battery Capacity
- Displays storage capacity of 12V lead acid batteries as a percentage
- Powered by battery under test

For quantities of 5 and up, call for quote.

MOUSER STOCK NO.	B & K Part No.	Max Input Volt.	Dimensions (In.)			Weight (lbs)	Cap. Display Range	Price Each
			W	H	D			
615-600	600	20V	3.14	6.30	1.60	2.20	0-100%	309.00

