

SCHURTER Power Entry Modules



SCHURTER KEB SERIES: AC INLETS WITH LINE SWITCH FOR PANEL MOUNT

Specifications:


- For "cold" connections 65°C
- Class I level of protection (with ground terminal); IEC320/C14
- Rating: UL/CSA/VDE - 10A/250V
- SPST or DPST switch (On-Off)
- Terminals: .187" quick connect
- Screw mount from front or rear, snap-in from front



For quantities of 200 and up, call for quote.

MOUSER STOCK NO.	Schurter Part No.	Fig.	Panel Thickness	No. of Poles (Switch)	Mounting Type	Price Each			
						1	25	50	100
693-4302.0001	4302.0001	A	6mm max.	1	Screw-on	8.16	7.25	6.52	6.16
693-4302.2001	4302.2001	B	6mm max.	2	Screw-on	10.48	9.30	8.37	7.91
693-4302.2002	4302.2002	C	2.0mm	2	Snap-in	10.48	9.30	8.37	7.91
Accessories for KEB									
693-0859.0047	0859.0047	-----	Insulation cover, flexible plastic PVC, for 1-pole KEB			1.44	1.28	1.16	1.09
693-0859.0075	0859.0075	-----	Insulation cover, flexible plastic PVC, for 2-pole KEB			2.00	1.77	1.61	1.51
693-0888.0004	0888.0004	-----	Cord retaining clamp for screw-on KEB			6.87	6.11	5.50	5.19

DIMENSIONS: mm

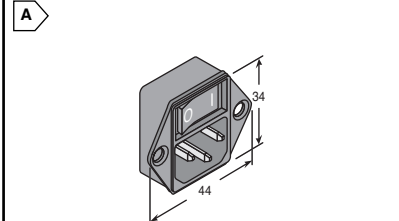

SCHURTER 6200/6220 SERIES: AC INLETS WITH FUSEHOLDER

Specifications:





- For "cold" connections 70°C
- Class I level of protection (with ground terminal); IEC320/C14
- Rating: UL/CSA/VDE - 10A/250V
- 6200 fusedrawers meet requirements of tool only accessibility of medical standards IEC 601-1



Casing and fusedrawer combined, 5x20mm fuses sold separately.

For quantities of 200 and up, call for quote.

MOUSER STOCK NO.	Schurter Part No.	Fig.	No. of Poles (Fuseholder)	Mounting Type	Terminal Type	Price Each			
						1	25	50	100
693-6200.2100	6200.2100	D	1	Screw-on	.138" solder	3.09	2.75	2.48	2.34
693-6200.4115	6200.4115	E	1	Snap-in	.138" solder, 1.5mm panel	3.09	2.75	2.48	2.34
693-6200.2200	6200.2200	D	1	Screw-on	.187" quick connect	3.09	2.75	2.48	2.34
693-6200.4215	6200.4215	E	1	Snap-in	.187" QC, 1.5mm panel	3.09	2.75	2.48	2.34
693-6200.2300	6200.2300	D	1	Screw-on	.250" quick connect	3.09	2.75	2.48	2.34
693-6200.4315	6200.4315	E	1	Snap-in	.250" QC, 1.5mm panel	3.09	2.75	2.48	2.34
693-6220.2100	6220.2100	F	2	Screw-on	.138" solder	6.52	5.80	5.22	4.93
693-6220.5115	6220.5115	G	2	Snap-in	.138" solder, 1.5mm panel	6.52	5.80	5.22	4.93
693-6220.2300	6220.2300	F	2	Screw-on	.250" quick connect	6.52	5.80	5.22	4.93
693-6220.5315	6220.5315	G	2	Snap-in	.250" QC, 1.5mm panel	6.52	5.80	5.22	4.93
Accessories									
693-0859.0047	0859.0047	-----	Insulation cover, flexible plastic PVC, UL 94V-0 rated			1.44	1.28	1.16	1.09
693-0888.0004	0888.0004	-----	Cord retaining clamp for screw-on 6200 and 6220			6.87	6.11	5.50	5.19

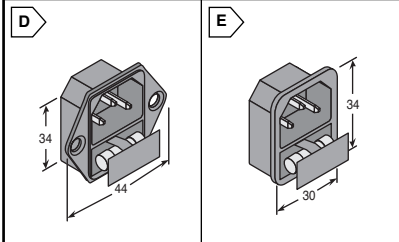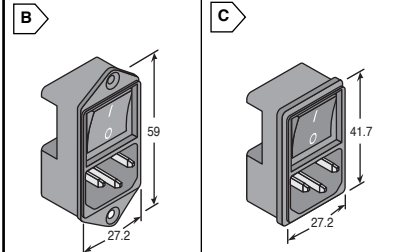

(Fuse not included)

(Fuse not included)

SCHURTER KM SERIES: AC INLETS WITH SWITCH AND FUSEHOLDER

Specifications:





- For "cold" connections 65°C
- Class I level of protection (with ground terminal); IEC320/C14
- Rating: UL/CSA/VDE - 10A/250V
- Medical fusedrawers meet requirements of tool only accessibility of medical standards IEC 601-1



Fusedrawers and casings must be ordered separately, 5X20mm fuses sold separately

For quantities of 200 and up, call for quote.

MOUSER STOCK NO.	Schurter Part No.	Fig.	Panel Thickness	No. of Poles Fuseholder/Switch	Mounting Type	Price Each			
						1	25	50	100
Casing only without EMC Shield									
693-KM00.1105.11	KM00.1105.11	H	1.5mm	2/2	Snap-in	13.05	11.60	10.43	9.86
693-KM00.1205.11	KM00.1205.11	H	2.0mm	1/2	Snap-in	8.52	7.57	6.82	6.44
Casing only with EMC Shield									
693-KM01.1105.11	KM01.1105.11	H	1.5mm	2/2	Snap-in	14.91	13.26	11.93	11.27
693-KM01.1205.11	KM01.1205.11	H	2.0mm	1/2	Snap-in	9.94	8.84	7.96	7.52
Fusedrawers for KEA and KM Series									
693-4301.1405	4301.1405	-----	Standard, 1-pole, black			1.70	1.49	1.35	1.28
693-4301.1407	4301.1407	-----	Medical, 1-pole, black			1.65	1.46	1.32	1.25
693-4301.1401	4301.1401	-----	Standard, 2-pole, black			2.77	2.45	2.21	2.09
693-4301.1403	4301.1403	-----	Medical, 2-pole, black			2.84	2.52	2.27	2.14
693-4301.1413	4301.1413	-----	Standard, 2-pole, black, with neutral side shorting bar			3.72	3.31	2.98	2.82
693-4301.1415	4301.1415	-----	Medical, 2-pole, black, with neutral side shorting bar			3.72	3.31	2.98	2.82

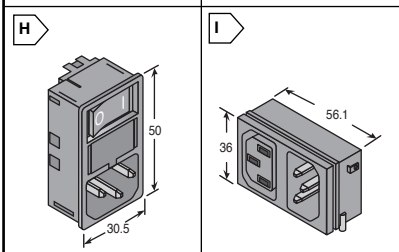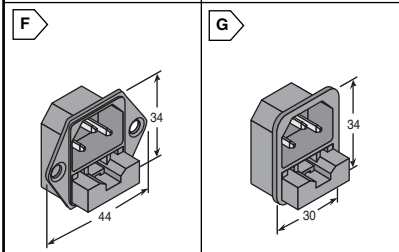

Shown w/o EMC shield

SCHURTER KP SERIES: PCB MOUNT POWER ENTRY MODULES

Specifications:



- For "cold" connections 65°C
- Panel thickness 1.5-2.0mm
- Class I level of protection (with ground terminal)
- Fusedrawers meet requirements of tool only accessibility of medical standards IEC 601-1
- 2 M3 self-tapping screws included with screw on mounting types
- Ratings: Inlet/Outlet & Inlet/Fusedrawer - UL/CSA/VDE - 10A/250V
Inlet/Switch - UL/CSA - 15A/250V, VDE - 10A/250V



5X20mm fuses for fusedrawer types sold separately

For quantities of 200 and up, call for quote.

MOUSER STOCK NO.	Schurter Part No.	Fig.	No. of Poles (Fuseholder)	Mounting Type	Terminal Type	Price Each			
						1	25	50	100
693-KP01.1012.01	KP01.1012.01	I	-----	Snap-in feet	AC inlet with AC outlet	5.17	4.59	4.13	3.90
693-KP01.1052.01	KP01.1052.01	I	-----	Screw-on	AC inlet with AC outlet	5.49	4.88	4.39	4.15
693-KP01.1212.11	KP01.1212.11	J	1	Snap-in feet	AC inlet with on/off line switch	8.57	7.61	6.86	6.48
693-KP01.1252.11	KP01.1252.11	J	1	Screw-on	AC inlet with on/off line switch	8.95	7.96	7.17	6.77
693-KP01.1112.11	KP01.1112.11	J	2	Snap-in feet	AC inlet with on/off line switch	8.82	7.83	7.06	6.66
693-KP01.1152.11	KP01.1152.11	J	2	Screw-on	AC inlet with on/off line switch	9.21	8.18	7.36	6.95
693-KP01.1412.01	KP01.1412.01	K	1	Snap-in feet	AC inlet with fusedrawer	6.47	5.75	5.17	4.89
693-KP01.1452.01	KP01.1452.01	K	1	Screw-on	AC inlet with fusedrawer	7.01	6.24	5.61	5.29
693-KP01.1312.01	KP01.1312.01	K	2	Snap-in feet	AC inlet with fusedrawer	7.38	6.56	5.91	5.58
693-KP01.1352.01	KP01.1352.01	K	2	Screw-on	AC inlet with fusedrawer	7.85	6.97	6.28	5.92

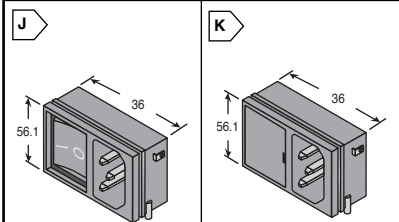

Fusedrawer meets medical standard IEC60-1